



Contact Methods
Mob: (86)18668768846
Tel: (86) 577 68668118
Wechat: zigpac123
Skype: bruce.chan1999
E-mail: bruce@zigpac.com
Whatsapp: +86-18668768846
Telegram: @Zigpacstickers

Company Info
Name: Wenzhou Zigpac Industry Limited
Address: No. 148-152, Building C, Jiangbin
Commercial and Residential Building, Longgang
City, Wenzhou City, Zhejiang 325802, China




YOUR CUSTOM PRINTING & PACKAGING PARTNER FOR SMALL AND MEDIUM BUSINESSES



Details

RFQ

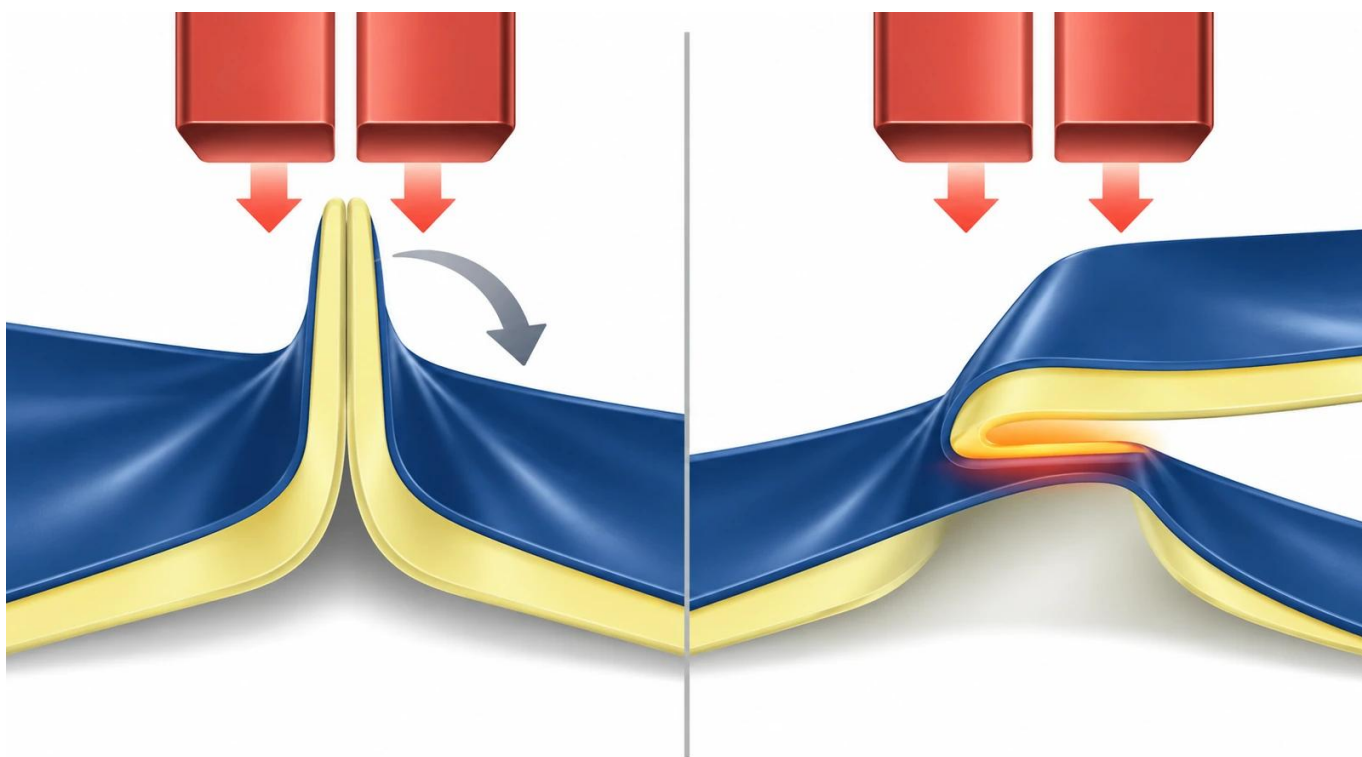[illegible]

11

1. [Introduction](#)
2. [Getting started](#)
3. [Installation](#)
4. [Usage](#)
5. [Configuration](#)
6. [FAQ](#)
7. [FAQ](#)
8. [License](#)

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

- [illegible]

[illegible][illegible]

PET/PE
 PET/VMPET/PE
 PET/AL/PE
 PET/PE
 PET/PE

[illegible]

21
CFR 177.1520^[3]

2026年12月31日以前にEUの規制値（25 ppb）にPFASの濃度が250 ppb以上50 ppm未満の範囲で検出された場合は、PPWRによるEUのPFAS規制^[4]の適用範囲に該当する。


How2Recycle 是 1 個 2038 年 前 的 B 級 回收 標 記。 [5] EU 2025/40 [6] .

ASTM F88 测试方法

ASTM F88 测试方法用于评估多层材料在受到垂直压力时的密封性能。该测试通过施加压力来模拟实际使用中的情况，并观察材料是否发生泄漏。

- 测试过程中，材料被夹在两个金属板之间，并受到垂直压力的作用。如果材料发生泄漏，则表明其密封性能不足。
- 测试结果通常以泄漏量或密封成功率来表示。这有助于评估材料的密封性能，并为材料的选择提供依据。

在测试过程中，材料被夹在两个金属板之间，并受到垂直压力的作用。如果材料发生泄漏，则表明其密封性能不足。测试结果通常以泄漏量或密封成功率来表示。这有助于评估材料的密封性能，并为材料的选择提供依据。

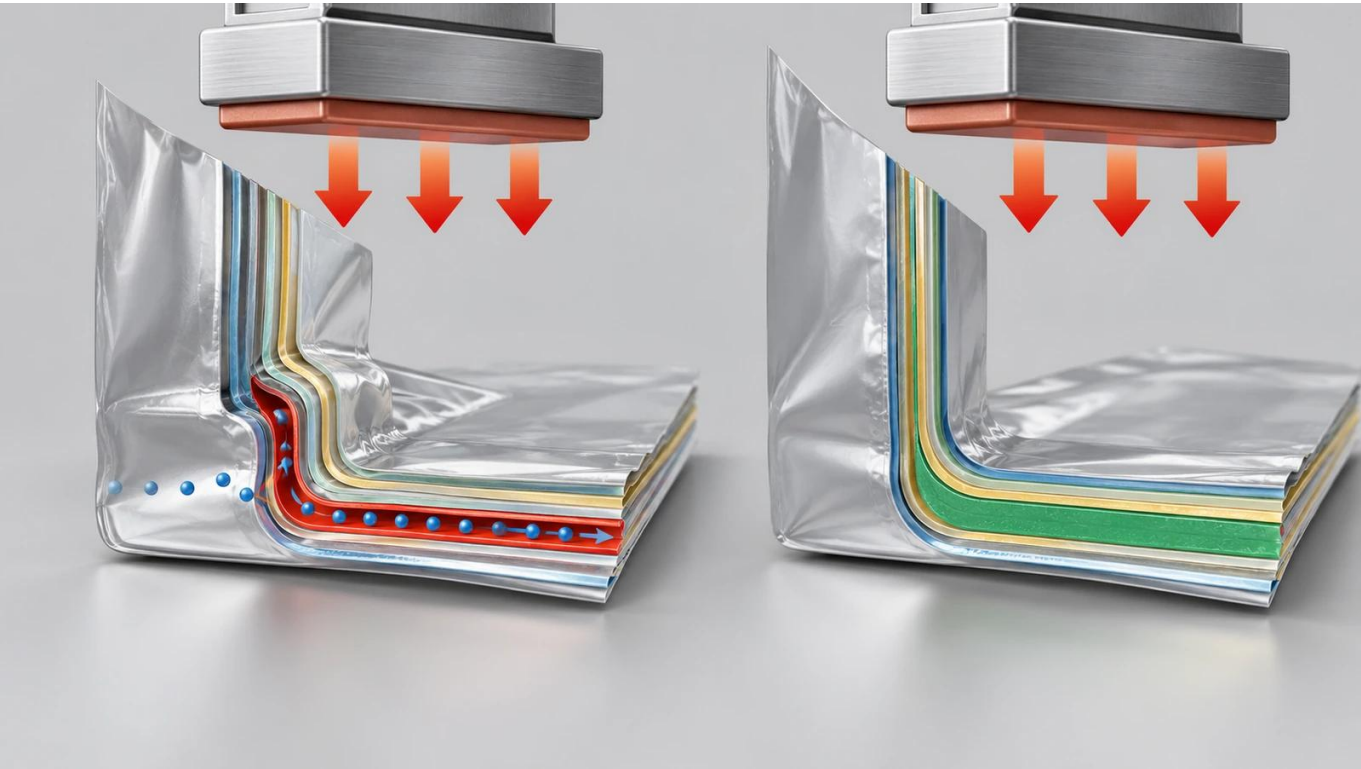

ASTM F88 测试方法用于评估多层材料在受到垂直压力时的密封性能。该测试通过施加压力来模拟实际使用中的情况，并观察材料是否发生泄漏。测试结果通常以泄漏量或密封成功率来表示。这有助于评估材料的密封性能，并为材料的选择提供依据。

在测试过程中，材料被夹在两个金属板之间，并受到垂直压力的作用。如果材料发生泄漏，则表明其密封性能不足。测试结果通常以泄漏量或密封成功率来表示。这有助于评估材料的密封性能，并为材料的选择提供依据。

测试方法

测试过程中，材料被夹在两个金属板之间，并受到垂直压力的作用。如果材料发生泄漏，则表明其密封性能不足。测试结果通常以泄漏量或密封成功率来表示。这有助于评估材料的密封性能，并为材料的选择提供依据。

References

- Food packaging materials must be tested for PFAS migration — FDA ID# 54% 430 791 74.8% ()
- Food packaging materials must be tested for PFAS migration — 21 CFR 177.1520 ()
- Food packaging materials must be tested for PFAS migration — 6 lb/in 5 lb/in ()
- Food packaging materials must be tested for PFAS migration — 1/8 MIL-PRF-44073J ()
- Food packaging materials must be tested for PFAS migration — 25 ppb 250 ppb 50 ppm 12 2026 ()

Notes

Food packaging materials must be tested for PFAS migration. PET, T, and other materials are included. The testing must be done according to the FDA ID# 54% 430 791 74.8% (). The testing must be done according to 21 CFR 177.1520 (). The testing must be done according to 6 lb/in 5 lb/in (). The testing must be done according to 1/8 MIL-PRF-44073J (). The testing must be done according to 25 ppb 250 ppb 50 ppm 12 2026 ().

References

1. FDA Food Safety Inspection Service. Food packaging materials must be tested for PFAS migration. https://foodsafety.wisc.edu/wp-content/uploads/sites/1026/2024/02/BAM_TestingFlexiblePkg.pdf
2. Lungren M., Okezue M., Food Packaging Forum. AAPS Open 11:30 2025-12-15. <https://link.springer.com/article/10.1186/s41120-025-00134-2>
3. eCFR 21 CFR 177.1520. <https://www.ecfr.gov/current/title-21/section-177.1520>
4. Food Packaging Forum. PPWR PFAS limits apply from August 12. <https://foodpackagingforum.org/news/ppwr-pfas-limits-apply-from-august-12>
5. How2Recycle. About the How2Recycle label. <https://how2recycle.info/about-the-how2recycle-label/store-drop-off-us-only/>
6. European Union. Regulation (EU) 2025/40. <https://eur-lex.europa.eu/eli/reg/2025/40/oj>
7. DLA. PKG&QAP A-A-20177E, 2013-08-01. <https://www.dla.mil/Portals/104/Documents/TroopSupport/Subsistence/Rations/cids/qapkg/Q-20177E.pdf>
8. MIL-PRF-44073J. https://www.dla.mil/Portals/104/Documents/TroopSupport/Subsistence/Rations/mil/44073J_ch01.pdf
9. WFP. <https://docs.wfp.org/api/documents/WFP-0000156789/download/>
10. USDA. <http://www.fsis.usda.gov/food-safety/safe-food-handling-and-preparation/food-safety-basics/meat-and-poultry-packaging>