



Contact Methods  
Mob: (86)18668768846  
Tel: (86) 577 68668118  
Wechat: zigpac123  
Skype: bruce.chan1999  
E-mail: bruce@zigpac.com  
Whatsapp: +86-18668768846  
Telegram: @Zigpacstickers

Company Info  
Name: Wenzhou Zigpac Industry Limited  
Address: No. 148-152, Building C, Jiangbin  
Commercial and Residential Building, Longgang  
City, Wenzhou City, Zhejiang 325802, China






# YOUR CUSTOM PRINTING & PACKAGING PARTNER FOR SMALL AND MEDIUM BUSINESSES

---




Product Image

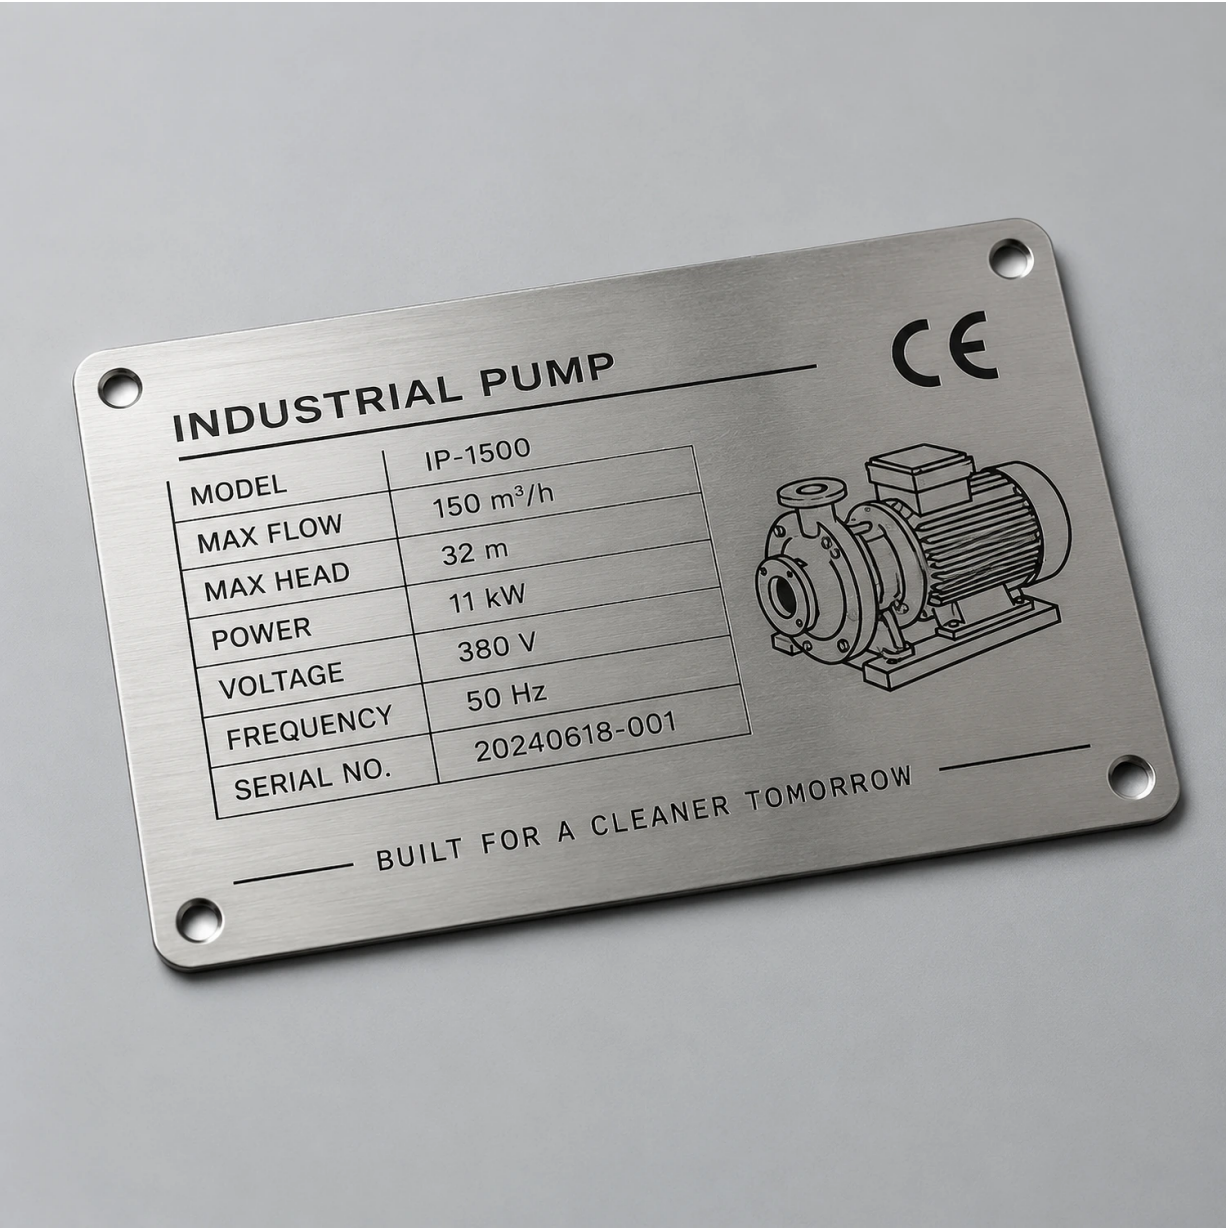

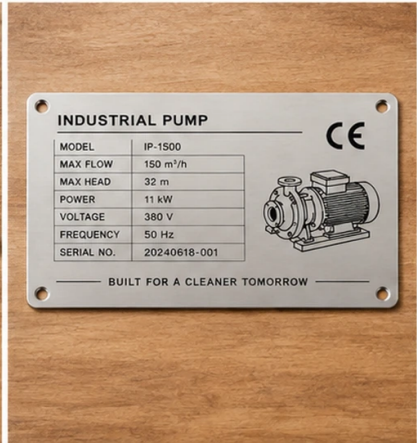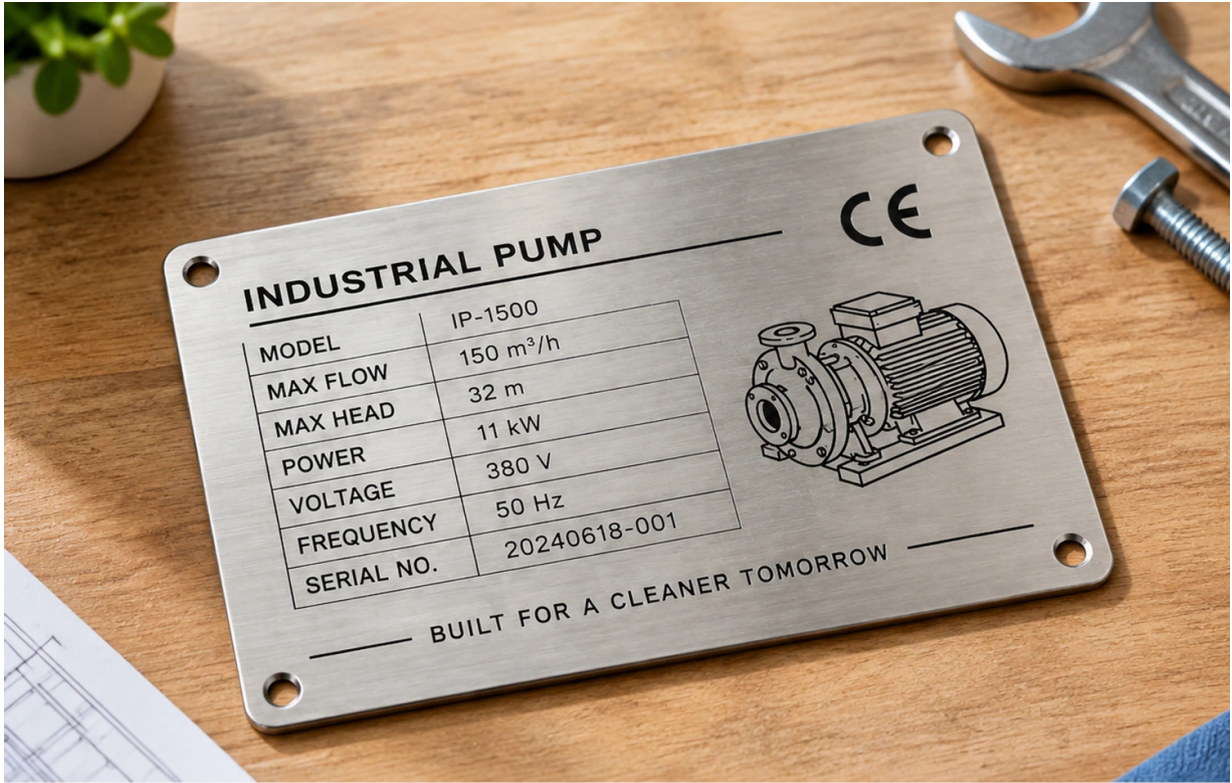

# INDUSTRIAL PUMP

CE



|            |                       |
|------------|-----------------------|
| MODEL      | IP-1500               |
| MAX FLOW   | 150 m <sup>3</sup> /h |
| MAX HEAD   | 32 m                  |
| POWER      | 11 kW                 |
| VOLTAGE    | 380 V                 |
| FREQUENCY  | 50 Hz                 |
| SERIAL NO. | 20240618-001          |


BUILT FOR A CLEANER TOMORROW







**INDUSTRIAL PUMP**

CE

|            |                       |
|------------|-----------------------|
| MODEL      | IP-1500               |
| MAX FLOW   | 150 m <sup>3</sup> /h |
| MAX HEAD   | 32 m                  |
| POWER      | 11 kW                 |
| VOLTAGE    | 380 V                 |
| FREQUENCY  | 50 Hz                 |
| SERIAL NO. | 20240618-001          |



BUILT FOR A CLEANER TOMORROW

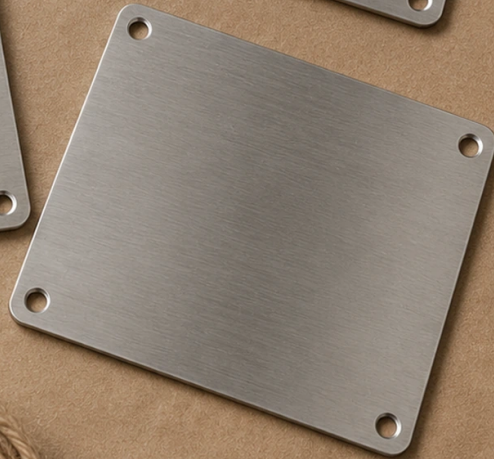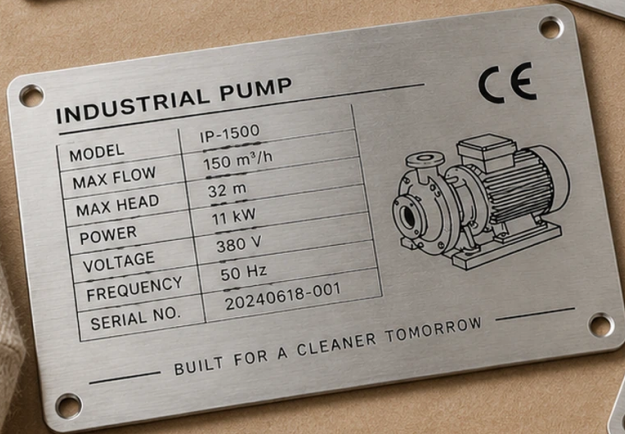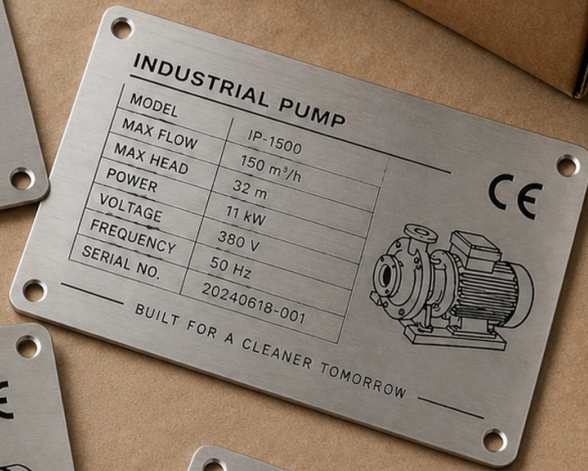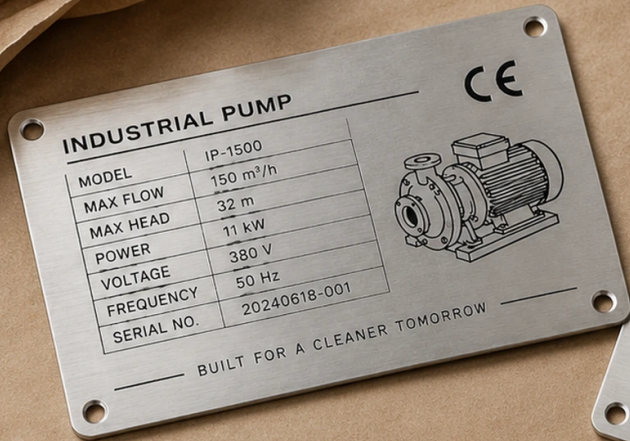



## Details

Our industrial pumps are designed for a wide range of applications, from small-scale industrial processes to large-scale water management systems. The IP-1500 model is particularly versatile, capable of handling a variety of liquids and solids. Its robust construction and efficient design make it a reliable choice for any industrial setting. The pump's performance is characterized by a maximum flow rate of 150 m³/h, a maximum head of 32 m, and a power consumption of 11 kW. It is designed to operate at 380 V and 50 Hz, ensuring compatibility with standard industrial power supplies. The serial number 20240618-001 is engraved on the plate for identification.


For more information, please visit our website or contact our sales team. [↑](#)

Our industrial pumps are designed for a wide range of applications, from small-scale industrial processes to large-scale water management systems. The IP-1500 model is particularly versatile, capable of handling a variety of liquids and solids. Its robust construction and efficient design make it a reliable choice for any industrial setting. The pump's performance is characterized by a maximum flow rate of 150 m³/h, a maximum head of 32 m, and a power consumption of 11 kW. It is designed to operate at 380 V and 50 Hz, ensuring compatibility with standard industrial power supplies. The serial number 20240618-001 is engraved on the plate for identification.

Our industrial pumps are designed for a wide range of applications, from small-scale industrial processes to large-scale water management systems. The IP-1500 model is particularly versatile, capable of handling a variety of liquids and solids. Its robust construction and efficient design make it a reliable choice for any industrial setting. The pump's performance is characterized by a maximum flow rate of 150 m³/h, a maximum head of 32 m, and a power consumption of 11 kW. It is designed to operate at 380 V and 50 Hz, ensuring compatibility with standard industrial power supplies. The serial number 20240618-001 is engraved on the plate for identification.





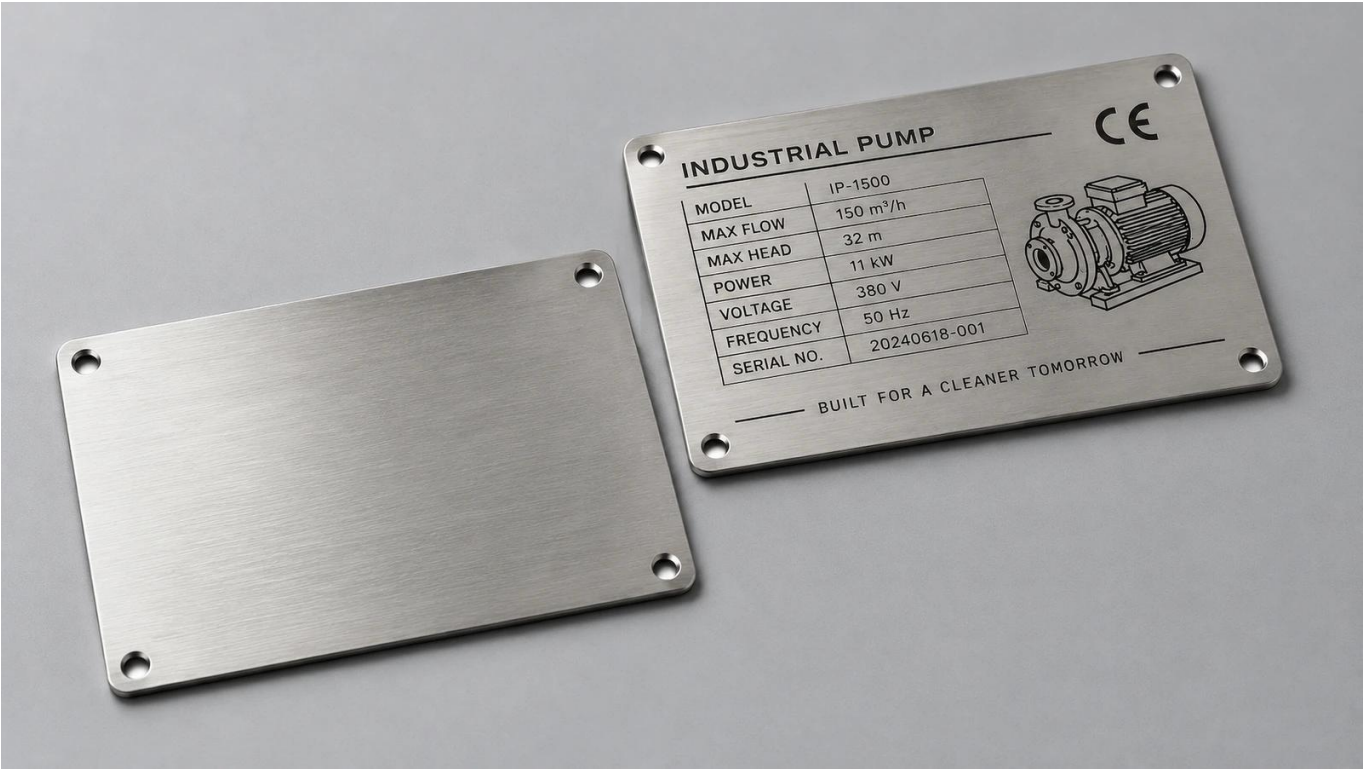


2

Hallmark Nameplate 316 2

|     |              |            |           |           |
|-----|--------------|------------|-----------|-----------|
| 304 | EN EN 1.4301 | 316 / 316L | EN 1.4401 | EN 1.4401 |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |
|     |              |            |           |           |

316 304 EN 1.4301 1.4401 304 316


Detroit Name Plate Etching 0.040 in

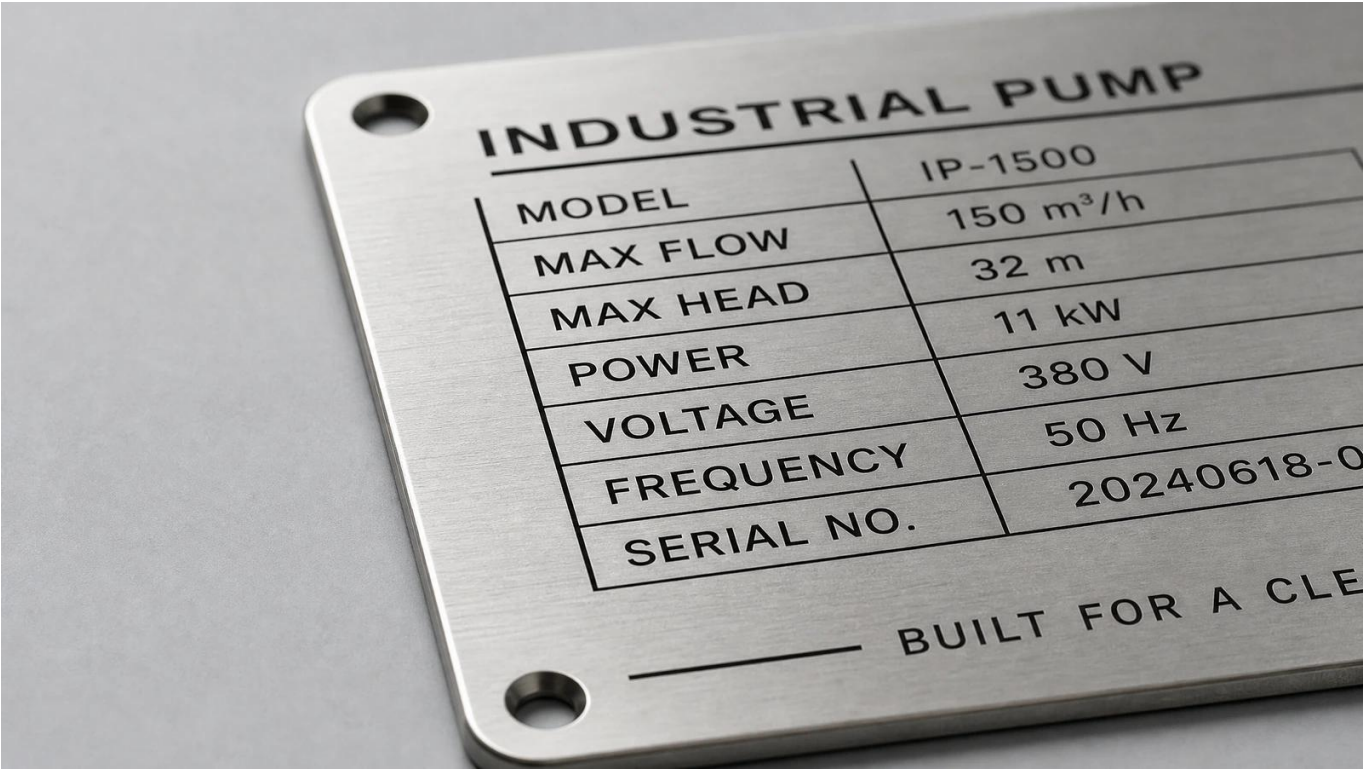

3

DXF

Data Matrix ISO/IEC 15415 AS9132

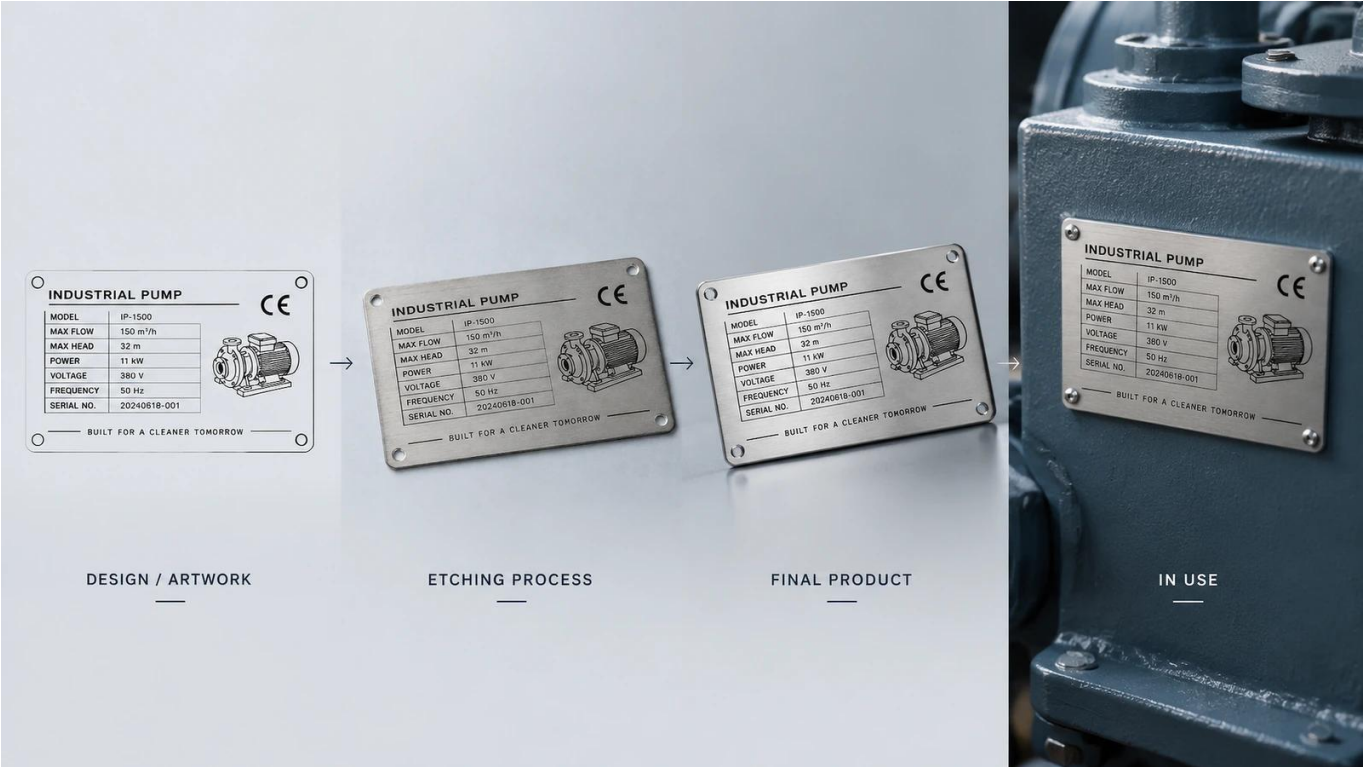


4

SITAPRESS<sup>[15]</sup> 0.05 mm±0.01 mmEN ISO 9227<sup>[16]</sup> 45°C 30428-40 μm/31625-35 μm0.05-0.10 mm

HXD0.2 mm0.1 mm<sup>[5]</sup>.

CNC Stryker Tough<sup>[17]</sup> 31618

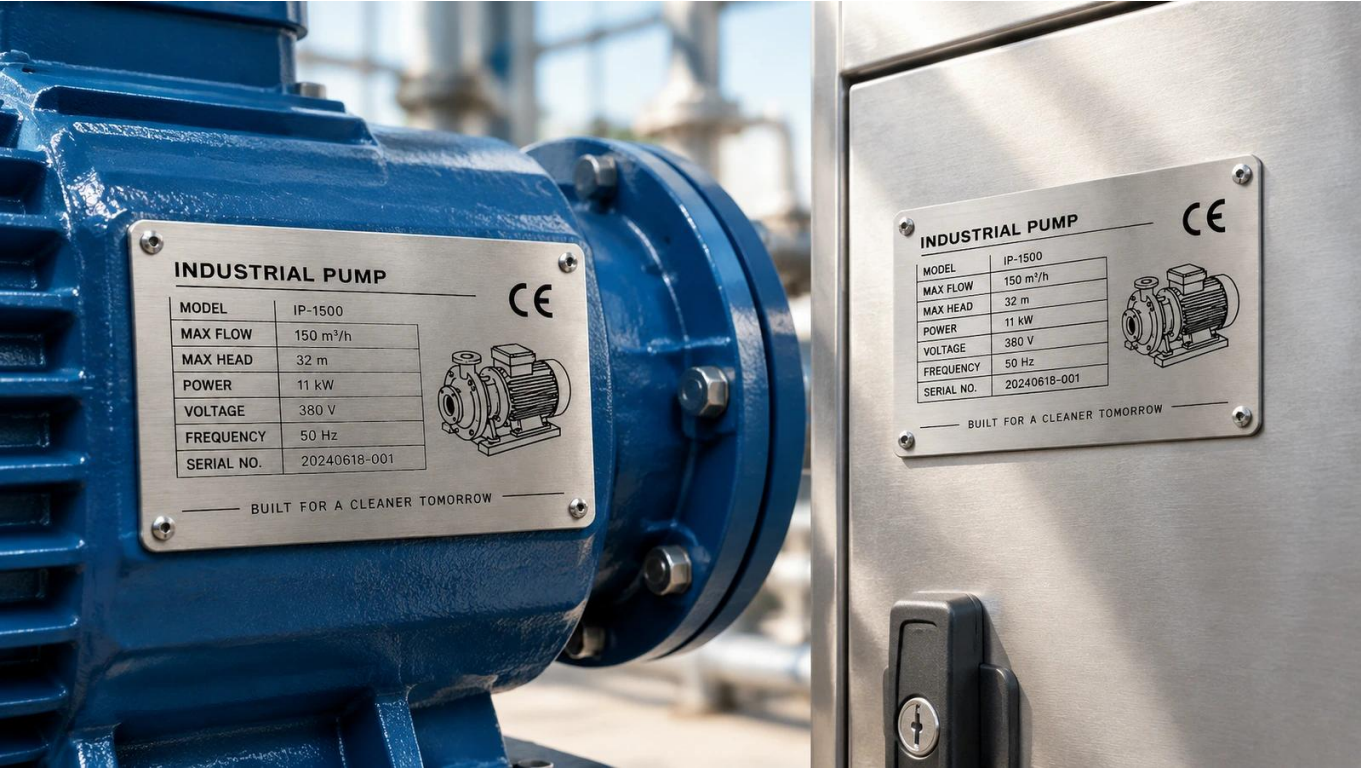

5

CARDIVNSWC-TR-62-00-052005 Camcode<sup>[18]</sup> 304 316ASTM A967

ASTM B117EN ISO 9227ISO 9001:2015





<sup>[4]</sup> DNPE [↩](#)

<sup>[5]</sup> HXD Nameplate 201-304 [↩](#)

<sup>[6]</sup> [↩](#) #4 #2B [↩](#)

<sup>[7]</sup> ASTM A240/A240M-25a [↩](#)

<sup>[8]</sup> Specialty Nameplate MIL-DTL-15024G MIL-STD-130 ISO/IEC 15415 AS9132 [↩](#)

<sup>[9]</sup> Red Safety IDs NFPA 79 NEC 670 CE [↩](#)

<sup>[10]</sup> Metal Marker OSHA OSHA 1910.145 [↩](#)

<sup>[11]</sup> DNPE OSHA ANSI Z535.4 [↩](#)

<sup>[12]</sup> Hallmark Nameplate [↩](#)

<sup>[13]</sup> Brand Signages [↩](#)

<sup>[14]</sup> Metal Grafix [↩](#)

<sup>[15]</sup> SITAPRESS EN ISO 9227 [↩](#)

<sup>[16]</sup> Etchmachinery [↩](#)

<sup>[17]</sup> Stryker Tough [↩](#)

<sup>[18]</sup> Camcode [↩](#)

<sup>[19]</sup> Metal Marker [↩](#)

<sup>[20]</sup> Seton 304 [↩](#)

---

## Product Option